

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

12922

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

LIQUID CRYSTAL DISPLAY DEVICE

and invented by:

HIROAKI MATSUYAMA

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 34 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

JC578 U.S. PTO
09/384186
08/27/99

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
12922

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 8 (Figs. 1-8)
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Specify Label No.): EL379563539US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
12922

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	41	- 20 =	21	x \$18.00	\$378.00
Indep. Claims	5	- 3 =	2	x \$78.00	\$156.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose) <u>Assignment</u>					\$40.00
TOTAL FILING FEE					\$1,334.00

- ☒ A check in the amount of \$1,334.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-1013/SSMP as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Paul J. Esatto, Jr.
Registration No. 30,749
Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, New York 11530
(516) 742-4343

Dated: August 27, 1999

CC:

LIQUID CRYSTAL DISPLAY DEVICE

FIELD OF THE INVENTION

5 This invention relates to a liquid crystal display device and, more particularly, to a liquid crystal display device of the "divided alignments type", generally termed as multi-domain alignment (particularly, multi-domain-vertical-alignment) in which, by aligning the liquid
10 crystal molecules differently in each domain within a single pixel, the visual-angle characteristics of the respective domains compensate for each other to provide a wide viewing-angle characteristic.

BACKGROUND OF THE INVENTION

15 Widely known examples of liquid crystal display devices include those of the twisted nematic (TN) type and those which employ electrically-controlled birefringence (ECB). However, a problem with these conventional devices is that since the alignments of the liquid crystal molecules
20 aligning under application of a voltage are uniform within a pixel, tonality differs depending upon the angle of view. A technique (multi-domain alignment) through which the directions of alignment of liquid crystal molecules in a single pixel are made to differ is available as a method of
25 improving upon the visual-angle characteristic. With a

liquid crystal device of this kind, the visual-angle characteristics of the multi-domains compensate for each other, as a result of which the characteristic is improved.

Multi-domain alignment methods are described in the specifications of Japanese Patent Kokai Publication JP-A-
5 Nos. 7-318940, 8-292423, 9-80399, 9-304757 and 9-21913.

These examples of the prior art place surrounding walls about a pixel and regulate the alignment of the wall surfaces to thereby realize an alignment that is symmetrical with
10 respect to an axis perpendicular to a plate (substrate) at the center of the area surrounded by the walls. Multi-

domain alignment is achieved as a result. Alternatively, protruding and recessed portions having axial symmetry with respect to the above-mentioned axis of symmetry are formed
15 to correspond to the pixel, whereby similar multi-domain alignment is achieved. The art set forth in the

specification of Japanese Patent Kokai Publication JP-A-8-292423 will be described with reference to Fig. 6. Fig.
6 is a sectional view showing one pixel of a conventional
20 liquid crystal display device. As shown in Fig. 6, walls

23, 24 each comprising a resist or the like are formed on a plate 1 so as to surround a pixel electrode 22, and a recessed portion 25 consisting of a resist film is formed between the walls 23 and 24. A counterelectrode 26 is
25 provided on a plate 2 on the opposite side of the device,

and a projecting portion 27 is formed on the
counterelectrode 26. The plates 1, 2 are arranged to oppose
each other in such a manner that the recessed and projecting
portions 25, 26 will have common axes of symmetry. If the
5 gap between the plates 1, 2 is filled with a mixture of at
least liquid crystal and a hardening resin and the liquid
crystal and hardening resin are caused to undergo phase
separation, a liquid crystal area will develop in such a
manner that the liquid crystal precipitates in the recess
10 25 or surrounds the protrusion 27. When this occurs, the
liquid crystal molecules in the vicinity of the recess 25
or in the vicinity of the protrusion 27 become oriented with
axial symmetry, such as in radiating form or in the form of
concentric circles, with the axis being perpendicular to the
15 plates.

SUMMARY OF THE DISCLOSURE

In the course of investigations toward the present
invention, various problems have been encountered.
Particularly a number of problems arise with the example of
20 the prior art described above.

A first problem is that distribution of spacers
(spheres etc.) generally used to maintain the panel gap
between the plates is inappropriate. The reason for this
is that the presence of spacers in the pixel areas tends to
25 provide nuclei resulting in poor liquid crystal alignment,

thereby greatly degrading the display characteristic. In contrast, if the spacers would be provided at portions where there are no pixels in order to avoid the problem of poor alignment, this increases the number of process steps.

5 A second problem is the requirement of process steps for mixing the hardening resin with the liquid crystal and causing phase separation and curing after the panel is filled. As a result, process load for forming the liquid crystal alignment is great.

10 Accordingly, an object of the present invention is to provide a multi-domain alignment liquid crystal display device in which regulation of the alignment of liquid crystal molecules is carried out through a simple process and panel gap can be maintained in stable fashion.

15 According to a first aspect of the present invention, there is provided a novel active-matrix liquid crystal display device. The device comprises generally first and second transparent insulating plates arranged to oppose each other, the first plate having disposed thereon a
20 plurality of scanning lines and a plurality of signal lines, thin-film transistors provided in the vicinity of intersections between the scanning lines and signal lines, and pixel electrodes connected to the thin-film transistors, the second plate having a black matrix provided with
25 openings at areas that oppose the pixel electrodes, a color

layer and counterelectrodes provided so as to oppose the pixel electrodes, a liquid crystal sandwiched between the opposing first and second plates being controlled by voltage impressed across the pixel electrodes and counterelectrodes.

5 Further an orientation layer is provided on the pixel electrodes of the first plate via an insulating film, the orientation layer being formed into a curved surface and causing molecules of the liquid crystal to become oriented in a direction normal to the curved surface of the orientation layer, and columnar spacers for regulating panel gap are provided between the two opposing plates. Particularly, each pixel is provided with one spacer.

10 In the first aspect of present invention, each columnar spacer has an end portion on one side thereof that preferably is disposed approximately at the center of the orientation layer formed on the first plate.

15 In a case where the orientation layer formed on the first plate defines a cavity recessed toward the side of the first plate in a cross section taken along a normal to the plate, the diameter of the columnar spacer becomes progressively smaller in the direction toward the second plate.

20 In a case where the orientation layer formed on the first plate defines a protrusion directed toward the side of the second plate in a cross section taken along a normal

25

to the plate, the diameter of the columnar spacer becomes progressively larger in the direction toward the second plate.

According to a second aspect of the present invention,
5 there is provided an active-matrix liquid crystal display device generally comprising first and second transparent insulating plates arranged to oppose each other, the first plate having disposed thereon a plurality of scanning lines and a plurality of signal lines, thin-film transistors
10 provided in the vicinity of intersections between the scanning lines and signal lines, and pixel electrodes connected to the thin-film transistors, the second plate having a black matrix provided with openings at areas that oppose the pixel electrodes, a color layer and
15 counterelectrodes provided so as to oppose the pixel electrodes, a liquid crystal sandwiched between the opposing first and second plates being controlled by voltage impressed across the pixel electrodes and counterelectrodes. Further, the pixel electrodes on the first plate and an
20 orientation layer formed on the pixel electrodes define curved surfaces, and columnar spacers for regulating panel gap are provided between the two opposing plates.

In the second aspect of the present invention, the alignment (orientation) layer is formed, e.g., by oblique
25 vapor deposition of SiO₂ and molecules of the liquid crystal

are oriented substantially at right angles to the plane of the plate.

Each of the columnar spacers has an end portion on one side thereof that preferably is disposed approximately at the center of the pixel electrode formed on the first plate.

In a case where the pixel electrode formed on the first plate defines a cavity recessed toward the first plate in a cross section taken along a normal to the plate, the diameter of the columnar spacer becomes progressively larger (or smaller) in the direction toward the second plate.

In a case where the pixel electrode formed on the first plate defines a protrusion directed toward the second plate in a cross section taken along a normal to the plate, the diameter of the columnar spacer becomes progressively smaller (or larger) in the direction toward the second plate.

According to a third aspect, there is provided a multi-domain alignment active-matrix liquid crystal display device comprising; first and second transparent plates arranged to oppose each other; a liquid crystal being sandwiched between the first and second plates, and pixel electrodes disposed on one of the plates and counterelectrodes disposed on the other of the plates and adapted to apply voltage to the liquid crystal across the

pixel electrodes and the counterelectrodes;

wherein an orientation layer is provided on each pixel electrode of one of said plates via an insulating film,

wherein the orientation layer is formed into a curved
5 or slanted surface so as to orient molecules of the liquid crystal in a direction normal to the curved or slanted surface of said orientation layer, and

wherein columnar spacers are provided between the two opposing plates for regulating a panel gap between the
10 plates.

The columnar spacers are disposed approximately at a center of the orientation layer on a pixel. The orientation layer defines a cavity recessed toward one of said plates. The columnar spacer has a side wall adapted to assist
15 alignment of the liquid crystal molecules oriented by the orientation layer to secure multi-domain alignment thereof. The orientation layer defines a protrusion or recess directed toward one of said plates.

According to a fourth aspect of the present invention,
20 there is provided a multi-domain alignment active-matrix liquid crystal display device comprising like components as in the third aspect, provided that an orientation layer is provided on each pixel electrode of one of the plates,

wherein the orientation layer and the pixel electrode
25 are formed into a curved or slanted surface;

wherein columnar spacers are provided between the two opposing plates for regulating a panel gap between the plates.

According to a fifth aspect, there is provided a multi-domain alignment active-matrix liquid crystal display device comprising the components as in the third aspect, provided that an orientation layer is provided at least on each pixel electrode disposed on one of the plates, and

that columnar spacers are provided between the two opposing plates for regulating a panel gap between the plates.

The columnar spacers have a side wall adapted to pre-align molecules of the liquid crystal surrounding each of the columnar spacers centering thereat. The columnar spacers have a diameter varying along its axis. The columnar spacers have a diameter decreasing or increasing toward one end thereof.

The side wall is adapted to pre-align molecules of the liquid crystal, e.g., substantially parallel to the side wall. The orientation layer is formed into a curved or slanted surface so as to orient molecules of the liquid crystal in a defined direction normal to the curved or slanted surface of the orientation layer.

The curved or slanted surface is formed into a recess

or protrusion.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a sectional view showing one pixel of a liquid crystal display device according to a first embodiment of the present invention;

Fig. 2 is a plan view showing one pixel of a liquid crystal display device according to the first embodiment of the present invention;

Fig. 3 is a sectional view showing one pixel of another structure of a liquid crystal display device according to the first embodiment of the present invention;

Fig. 4 is a sectional view showing one pixel of a liquid crystal display device according to a second embodiment of the present invention;

Fig. 5 is a sectional view showing one pixel of another structure of a liquid crystal display device according to the second embodiment of the present invention; and

Fig. 6 is a sectional view showing one pixel of a liquid crystal display device according to the prior art.

Figs. 7 and 8 schematically illustrate the principle

of multi-domain alignment according to the present invention, respectively.

PREFERRED EMBODIMENTS OF THE INVENTION

In a preferred mode of a multi-domain alignment liquid
5 crystal display device, as shown in Fig. 1, a first plate
1 has a thin-film transistor provided at each point of
intersection of a scanning line and signal line, a pixel
electrode 8 connected to the thin-film transistor and an
orientation layer 10 formed on the pixel electrode and
10 defining a curved surface, a second plate 2 has three types
of color layers 13 that corresponding to the three colors
R, G, B, an counterelectrode 14 provided so as to oppose the
pixel electrode 8, and an orientation layer 11, a columnar
spacer 12 for regulating the panel gap is provided between
15 the two opposing plates 1, 2, and liquid crystal is
sandwiched between the two plates and subjected to
multi-domain alignment by the orientation layer 10 having
the curved surface and the columnar spacer.

Fig.7 schematically illustrates the concept of the
20 columnar spacer disposed at the center of the pixel
electrode between two opposing electrodes (pixel- and
counterelectrodes). By the provision of the columnar
spacer the molecules of the liquid crystal in a region
surrounding the spacer are pre-aligned in the direction
25 marked by arrows. The basic (or background) orientation is

determined by the orientation layers. In this case the orientation layers opposing each other orient the molecules of liquid crystal substantially normal to the surface plane of the orientation layer. The orientation direction of the orientation layer may be controlled by, e.g., oblique deposition technique of certain material, e.g., SiO which causes oblique orientation to the orientation layer. In Fig.7, the flux lines generally represent the basic orientation caused by the orientation layers.

The columnar spacer may or should have specific alignment properties of the liquid crystal molecules, either parallel, perpendicular or at angular relation to the side wall surface. The alignment properties may be determined and/or further emphasized by the dimensional shape or configuration and/or the nature of the material (alignment property, e.g., perpendicular or parallel to the surface thereof).

Fig.8 schematically represents the basic concept of the combination of the curved orientation layer 12 and the columnar spacer. The flux lines represent the background orientation caused by the orientation layers 11 and 12, in which the orientation is established perpendicular to the layer surface. The columnar spacer, being disposed at the center of the recess, further stabilizes the background orientation surrounding the spacer to give multi-domain

pre-alignment for one unit area (e.g., pixel).

If this alignment state is viewed from the top of the layer 11, there are observed optical multi-domains centered at the spacer for one pixel area.

5 This pre-aligned multi-domain formulation of the liquid crystal molecules provides a uniform gradation or tone of each pixel irrespective of the angle of view, i.e., in a wide angle of view.

10 Preferred embodiments of the present invention will now be described in detail with reference to the drawings.

[First Embodiment]

15 A liquid crystal display device according to a first embodiment of the present invention will be described with reference to Figs. 1 to 3, in which Fig. 1 is a sectional view showing one pixel of a liquid crystal display device according to the first embodiment, Fig. 2 a plan view of the one pixel and Fig. 3 a sectional view showing one pixel of a liquid crystal display device in which the shape of the curved surface of an orientation layer differs from that of
20 Fig. 1.

25 A method of manufacturing the liquid crystal device of the first embodiment will be described with reference to Figs. 1 and 2. First, a gate electrode 3 and gate wiring 18, which comprise a single layer or multiple layers of a metal such as Cr or ITO, are formed on the transparent plate

1 such as glass by a process such as sputtering and a
photoresist step, and a gate insulating film 4 comprising
the two layers of silicon oxide and silicon nitride is formed
on the gate electrode and gate wiring by a process such as
5 CVD. A semiconductor layer 5 comprising amorphous silicon
(a-Si, n+a-Si) is then formed by a processing (vapor
deposition technique) such as CVD and a photoresist step,
and a drain electrode 6, source electrode 7 and drain wiring
19, which comprise a single layer or multiple layers of a
10 metal such as Cr or ITO, are formed by a process such as
sputtering and a photoresist step. The steps described
thus far form the drain wiring, gate wiring and a switching
element. The wiring layer may extend in a direction
substantially in agreement with the direction of a
15 transmission axis of a polarizer provided on the first or
second plate.

Next, the pixel electrode 8 comprising a transparent,
electrically conductive film such as ITO is formed by a
process such as sputtering etc. and a photoresist step. A
20 recess is formed on the pixel electrode 8 by a transparent
insulating film 9. Specifically, acrylic resin or
polyimide resin, for example, is used as a thermoplastic
material, a portion having a comparatively large film
thickness is formed on the pixel electrode 8 by a photoresist
25 process, and then the oblique (or curved) surface and bottom

of the recess are formed utilizing the thermoplasticity of the material. Next, the orientation layer 10 comprising a transparent insulating film which causes liquid crystal molecules to align perpendicular to the film surface is formed on the insulating film 9. Specifically, polyimide resin SE-121 (manufactured by Nissan Kagaku K. K.) is applied to the insulating film 9 and the polyimide resin is heated (cured) under conditions that will suppress the thermoplasticity of the insulating film 9, thereby forming the orientation layer 10.

The columnar spacer 12 comprising an insulating film is formed substantially at the center of the recess. The columnar spacer 12 preferably is made of a material that will cause the liquid crystal molecules to align parallel to the surface of the spacer, and it is desired that the side surface of the spacer 12 be slanted or inclined. The direction of inclination is decided so as to agree with the direction in which the liquid crystal molecules are caused to slant by the recess. In this embodiment, it is preferred that the inclination of the side surface of the spacer 12 be such that the diameter (cross section) of the spacer will broaden in the direction toward the plate 1. Specifically, a column with vertical (upright or straight) side walls is formed from photosensitive acrylic resin or polyimide resin by a photoresist process. Then, when the column is heated

for curing, the temperature is raised gradually to form the inclined surface (side wall). It is required that this process be performed under conditions that will suppress the thermoplasticity of the insulating film 9 so as to finally
5 form the desired inclination.

The structure of the plate 2 on the opposite side of the device will now be described. If the device presents a color display, the color layers 13 are formed on the transparent plate 2, which consists of glass or the like.
10 A transparent electrically conductive film and the counterelectrode 14, which comprises ITO, are formed on the color layer(s) 13 as by sputtering. Next, the orientation layer 11 comprising a transparent insulating film which orient the liquid crystal molecules to align perpendicular
15 to the film surface is formed on the counterelectrode 14. Specifically, the orientation layer 11 is formed using polyimide resin SE-121 (manufactured by Nissan Kagaku K.K.).

Next, the plates (substrate) 1 and 2 with their
20 orientation layers opposing each other are disposed substantially in parallel with a fixed spacing maintained between them by the columnar spacer 12, and the gap between them is filled with a liquid crystal material whose dielectric anisotropy is negative. The material used is
25 MLC-6608 (Merck). In this embodiment, adding a hardening

resin to the liquid crystal material is unnecessary. However, hardening resin may be added if desired, as set forth in Japanese Patent Kokai Publication JP-A-8-292423, (the entire disclosure thereof being incorporated herein by
5 reference.)

Optical films 15, 16 are affixed to the outer-side surfaces of the plates 1 and 2. The optical films 15, 16 each comprise a polarizer or a combination of a polarizer and an optical compensation film. The polarizers affixed
10 to the plates are arranged in such a manner that the light absorption axes thereof are orthogonal to each other.

In the embodiment described above, a recess is formed by the insulating film 9. However, a protrusion may be formed by the insulating film 9, as illustrated in Fig. 3.

15 In this case the columnar spacer 12 is formed on the plate 2 and it is preferred that the columnar spacer 12 be formed in such a manner that its side surfaces be inclined in a direction that narrows the spacer in the direction toward the plate 1. Other components are the same as those shown
20 in Fig. 1.

Though the planar structure of the pixel electrode 8 may be rectangular in general, a circular or oval shape is preferred if matching with the recess or protrusion is taken into consideration. It is also possible to adopt a
25 composite shape such as the combination of rectangular and

circular shapes shown in Fig. 2.

In terms of operation of the present Embodiment the following explanation is given. Now referring to Fig. 1, the pixel surface of the plate 1 defines a recess. In the
5 initial state, which is devoid of applied voltage, the liquid crystal molecules are caused to orient generally perpendicular to the surface of the recess by the orientation layer 10. Accordingly, since the direction of an electric field produced when a potential difference
10 develops across the pixel electrode 8 and counterelectrode 14 is substantially perpendicular to the surfaces of the plates, the direction of orientation of the liquid crystal molecules in the initial state tilts relative to the direction of the electric field.

15 This direction of tilt agrees with the direction of tilt of the liquid crystal molecules oriented parallel to the surface of the columnar spacer 12. Since the liquid crystal molecules exhibit negative dielectric anisotropy, they tilt in a direction perpendicular to the electric field
20 when voltage is applied. In other words, the tilt is increased further in the initial direction of tilt, as indicated by the liquid crystal molecules 17 in Fig. 1. The transmittance of transmitted light is controlled by the angle of tilt. Since the liquid crystal molecules in one
25 pixel tilt with the columnar spacer 12 (i.e., the axis

thereof) serving as the axis of symmetry, the display characteristics of the respective directions of tilt compensate for each other even if the angle of sight (viewing angle) changes. This makes it possible to obtain a display in which there is little change in color at different viewing angles. The same effect can be obtained with the arrangement of Fig. 3 as well.

[Second Embodiment]

A liquid crystal display device according to a second embodiment of the present invention will be described with reference to Figs. 4 and 5, in which Fig. 4 is a sectional view showing one pixel of a liquid crystal display device according to the second embodiment, and Fig. 5 is a sectional view showing one pixel of a variant liquid crystal display device in which the shape of the curved surface of an orientation layer differs from that of Fig. 4.

The second embodiment differs from the first embodiment in that the pixel electrode 8 is provided on the insulating film 9 and basically defines the shape of a recess; wiring 20 is an electrically conductive film, preferably a transparent film so as not to block transmitted light, formed by a process such as sputtering and a photoresist step (here, using ITO) so as to electrically communicate the source electrode 7 and pixel electrode 8; a film which orients the liquid crystal molecules

perpendicular to the horizontal plane of the plates is adopted as an orientation layer 21 (and is formed, here, by oblique vapor deposition of SiO₂); and the direction of inclination of the side surface (wall) of the columnar spacer 12 is such that the cross section of the columnar spacer 12 narrows in the direction toward the plate 1.

According to this arrangement, the pixel electrode 8 generally makes up or defines a recess. As a result, the electric field produced at application of voltage is not perpendicular to the horizontal plane of the plates but is nearly perpendicular to the curved surface of the recess. When the liquid crystal molecules would be oriented perpendicular to the curved surface in the initial state, therefore, as in the foregoing embodiment, the direction of orientation and the direction of the electric field substantially would coincide and the directions in which the liquid crystal molecules tilt would occur in random fashion, thus causing a faulty display. Accordingly, it is desired that the liquid crystal molecules be oriented perpendicular to the plane of the plates in the initial state.

In this arrangement, the direction of tilt of the liquid crystal molecule 17 differs from that of the first embodiment and, hence, the direction of inclination of the side surface of columnar spacer 12 also is changed accordingly. Further, the wiring 20 may be formed through

a process the same as that used to fabricate the source electrode 7. In such case, use of a light-blocking electrically conductive film may be contemplated. However, a decline in transmittance can be suppressed by making the direction in which the wiring 20 extends agree with the direction of the light transmission axis of the polarizer as much as possible. Furthermore, by achieving electrical communication with the pixel electrode 8 at the bottom of the recess, it is unnecessary to separately provide an opening to effect such communication. This makes it possible to hold down any increase in the process load.

Fig. 5 illustrates a variant case in which the insulating film 9 is made a protrusion instead of a recess. Similar effects can be obtained with this arrangement as well. Further, in Fig. 5, the insulating film 9 is provided with a opening by a photoresist step in order to establish electrical communication between the source electrode 7 and the pixel electrode 8. However, depending upon the shape of the insulating film 9, the two electrodes can be communicated directly without forming an opening.

The present invention provides the effects described below.

The first effect is that the direction of alignment of the liquid crystal molecules can be regulated stably.

The reason for this is that the columnar spacer is formed

at the center of the recess or protrusion corresponding to a pixel, and the columnar spacer has a surface that slants in a direction that conforms to the direction in which the liquid crystal molecules are tilted. Furthermore, the liquid crystal molecules are oriented parallel to the slanted surface of the columnar spacer in the initial state. Since only a columnar spacer is present at the pixel portion of the device, faulty orientation or alignment does not readily occur.

A second effect is a smaller process load. The reason for this is that since the columnar spacer functions as both a column for regulating orientation of the liquid crystal molecules and a spacer for supporting (or retaining) the panel gap, the column and spacer can be formed by a single step. In addition, it is unnecessary to mix a hardening resin with a liquid crystal material in order for alignment of the liquid crystal to be achieved stably. This makes it possible to dispense with processes for phase separation and hardening.

As a result of the effects set forth above, it is possible to obtain, through a comparatively simple process, a liquid crystal display device having a wide viewing in which there is little variance in tonality or gradation of individual pixels observed mainly when the visual angle is changed.

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof
5 except as defined in the appended claims.

It should be noted that other objects and aspects of the present invention will become apparent in the entire disclosure and that modifications may be done without departing the gist and scope of the present invention as
10 disclosed herein and appended herewith.

Also it should be noted that any combination of the disclosed and/or claimed elements, matters and/or items may fall under the modifications aforementioned.

WHAT IS CLAIMED IS:

1. A multi-domain alignment active-matrix liquid crystal display device comprising;

first and second transparent insulating plates arranged to oppose each other;

5 said first plate having disposed thereon a plurality of scanning lines and a plurality of signal lines, thin-film transistors provided in the vicinity of intersections between the scanning lines and signal lines, and pixel electrodes connected to the thin-film transistors;

10 said second plate having a black matrix provided with openings at areas that oppose said pixel electrodes, a color layer and counterelectrodes provided so as to oppose said pixel electrodes;

15 a liquid crystal being sandwiched between the opposing first and second plates and being controlled by voltage impressed across said pixel electrodes and said counterelectrodes;

wherein an orientation layer is provided on each pixel electrode of said first plate via an insulating film,

20 wherein said orientation layer is formed into a curved surface and orient molecules of the liquid crystal aligned in a direction normal to the curved surface of said orientation layer, and

wherein columnar spacers are provided between the two

25 opposing plates for regulating a panel gap therebetween.

2. The device according to claim 1, wherein said columnar spacer has an end portion on one side thereof that is disposed approximately at a center of said orientation layer formed on said first plate.

3. The device according to claim 2, wherein said orientation layer formed on said first plate defines a cavity recessed toward said first plate in a cross section taken along a line normal to said plate; and

5 wherein said columnar spacer has a diameter that becomes progressively smaller in the direction of said second plate.

4. The device according to claim 2, wherein said orientation layer formed on said first plate defines a protrusion directed toward said second plate in a cross section taken along a line normal to said first plate; and

5 wherein said columnar spacer has a diameter that becomes progressively larger in the direction toward said second plate.

5. A multi-domain alignment active-matrix liquid crystal display device comprising first and second transparent insulating plates arranged to oppose each other;

said first plate having disposed thereon a plurality
5 of scanning lines and a plurality of signal lines, thin-film transistors provided in the vicinity of intersections

between the scanning lines and signal lines, and pixel electrodes connected to the thin-film transistors;

10 said second plate having a black matrix provided with openings at areas that oppose said pixel electrodes, a color layer and counterelectrodes provided so as to oppose said pixel electrodes;

15 a liquid crystal being sandwiched between the opposing first and second plates and being controlled by voltage impressed across said pixel electrodes and said counterelectrodes;

 wherein each of said pixel electrodes on said first plate and an orientation layer formed on said pixel electrode defines a curved surface, and

20 wherein columnar spacers are provided between the two opposing plates for regulating a panel gap therebetween.

6. The device according to claim 5, wherein said orientation layer is adapted to orient molecules of the liquid crystal substantially at right angles to the planes of said plates.

7. The device according to claim 6, wherein said orientation layer is formed by oblique vapor deposition of SiO.

8. The device according to claim 5, wherein said columnar spacer has an end portion on one side thereof that is disposed approximately at the center of the pixel electrode

formed on said first plate.

9. The device according to claim 6, wherein said columnar spacer has an end portion on one side thereof that is disposed approximately at the center of the pixel electrode formed on said first plate.

10. The device according to claim 8, wherein said pixel electrode formed on said first plate defines a cavity recessed toward said first plate in a cross section taken along a line normal to said first plate; and

5 wherein said columnar spacer has a diameter that becomes progressively larger in the direction toward said second plate.

11. The device according to claim 9, wherein said pixel electrode formed on said first plate defines a cavity recessed toward said first plate in a cross section taken along a line normal to said first plate; and

5 wherein said columnar spacer has a diameter that becomes progressively larger in the direction toward said second plate.

12. The device according to claim 8, wherein said pixel electrode formed on said first plate defines a protrusion directed toward said second plate in a cross section taken along a line normal to said first plate; and

5 wherein said columnar spacer has a diameter that becomes progressively smaller in the direction toward said

second plate.

13. The device according to claim 10, wherein a wiring layer is provided beneath said pixel electrode, and said wiring layer electrically connects a source or drain electrode of the thin-film transistor and said pixel
5 electrode.

14. The device according to claim 13, wherein said wiring layer extends in a direction substantially in agreement with the direction of a transmission axis of a polarizer provided on said first or second plate.

15. The device according to claim 1, wherein liquid crystal molecules contiguous to the surface of the columnar spacer are aligned substantially parallel to the surface of said columnar spacer.

16. The device according to claim 5, wherein liquid crystal molecules contiguous to the surface of the columnar spacer are aligned substantially parallel to the surface of said columnar spacer.

17. A multi-domain alignment active-matrix liquid crystal display device comprising;

first and second transparent plates arranged to oppose each other;

5 a liquid crystal being sandwiched between the first and second plates, and

pixel electrodes disposed on one of said plates and

counterelectrodes disposed on the other of said plates and adapted to apply voltage to the liquid crystal across the pixel electrodes and the counterelectrodes;

wherein an orientation layer is provided on each pixel electrode of one of said plates via an insulating film,

wherein said orientation layer is formed into a curved or slanted surface so as to orient molecules of the liquid crystal in a direction normal to the curved or slanted surface of said orientation layer, and

wherein columnar spacers are provided between the two opposing plates for regulating a panel gap between said plates.

18. The device according to claim 17, wherein said columnar spacers are disposed approximately at a center of said orientation layer on a pixel.

19. The device according to claim 18, wherein said orientation layer defines a cavity recessed toward one of said plates.

20. The device according to claim 19, wherein said columnar spacer has a side wall adapted to assist alignment of the liquid crystal molecules oriented by said orientation layer to secure multi-domain alignment thereof.

21. The device according to claim 20, wherein said orientation layer defines a protrusion directed toward one of said plates.

22. The device according to claim 21, wherein said columnar spacer has a side wall adapted to assist alignment of the liquid crystal molecules oriented by said orientation layer to secure multi-domain alignment thereof.

23. A multi-domain alignment active-matrix liquid crystal display device comprising;

first and second transparent plates arranged to oppose each other;

5 a liquid crystal being sandwiched between the first and second plates, and

pixel electrodes disposed on one of said plates and counterelectrodes disposed on the other of said plates and adapted to apply voltage to the liquid crystal across the pixel electrode and the counterelectrodes;

10 wherein an orientation layer is provided on each pixel electrode of one of said plates,

wherein said orientation layer and said pixel electrode are formed into a curved or slanted surface;

15 wherein columnar spacers are provided between the two opposing plates for regulating a panel gap between said plates.

24. The device according to claim 23, wherein said orientation layer is adapted to orient the liquid crystal molecules substantially at right angles to the planes of said plates.

25. The device according to claim 23, wherein said columnar spacers are disposed approximately at a center of said orientation layer on a pixel.
26. The device according to claim 23, wherein said pixel electrode defines a cavity recessed toward the counterelectrode.
27. The device according to claim 26, wherein said columnar spacer has a side wall adapted to provide multi-domain alignment of molecules of the liquid crystal.
28. The device according to claim 27, wherein said columnar spacer has a diameter increasing toward the counter pixel opposing the pixel electrode.
29. The device according to claim 28, wherein said orientation layer is adapted to orient molecules of the liquid crystal substantially at right angles to the planes of said plates.
30. The device according to claim 23, wherein said pixel electrode defines a curved or slanted protrusion protruding toward the counterelectrode.
31. The device according to claim 28, wherein said columnar spacer has a side wall adapted to provide multi-domain alignment of the liquid crystal molecules.
32. The device according to claim 31, wherein said columnar spacer has a diameter decreasing toward the counter pixel opposing the pixel electrode.

33. The device according to claim 32, wherein said orientation layer is adapted to orient the liquid crystal molecules substantially at right angles to the planes of said plates.

34. A multi-domain alignment active-matrix liquid crystal display device comprising;

first and second transparent plates arranged to oppose each other;

5 a liquid crystal being sandwiched between the first and second plates, and

pixel electrodes disposed on one of said plates and
counterelectrodes disposed on the other of said plates and
adapted to apply voltage to the liquid crystal across the
10 pixel electrodes and the counterelectrodes;

wherein an orientation layer is provided at least on each pixel electrode disposed on one of said plates, and

wherein columnar spacers are provided between the two
opposing plates for regulating a panel gap between said
15 plates.

35. The device according to claim 34, wherein said columnar spacers have a side wall adapted to pre-align molecules of the liquid crystal surrounding each of the columnar spacers centering thereat.

36. The device according to claim 35, wherein said columnar spacers have a diameter varying along its axis.

37. The device according to claim 35, wherein said columnar spacers have a diameter decreasing or increasing toward one end thereof.

38. The device according to claim 35, wherein said side wall is adapted to pre-align molecules of the liquid crystal substantially parallel to the side wall.

39. The device according to claim 35, wherein said
5 orientation layer is formed into a curved or slanted surface so as to orient molecules of the liquid crystal in a defined direction normal to the curved or slanted surface of said orientation layer.


40. The device according to claim 39, wherein said curved or slanted surface is formed into a recess.

41. The device according to claim 40, wherein said curved or slanted surface is formed into a protrusion.

ABSTRACT OF THE DISCLOSURE

A multi-domain alignment liquid crystal display device in which liquid crystal molecules are aligned through a simple process and panel gap is maintained in stable fashion includes a first plate having a thin-film transistor provided at each point of intersection of a scanning line and signal line, a pixel electrode connected to the thin-film transistor and a first orientation layer formed on the pixel electrode and defining a curved surface, and a second plate having RGB color layers, a counterelectrode provided so as to oppose the pixel electrode, and a second orientation layer. A columnar spacer for regulating the panel gap is provided between the two opposing plates, and liquid crystal is sandwiched between the two plates and subjected to multi-domain alignment by the first orientation layer having the curved surface and the columnar spacer.

FIG. 1

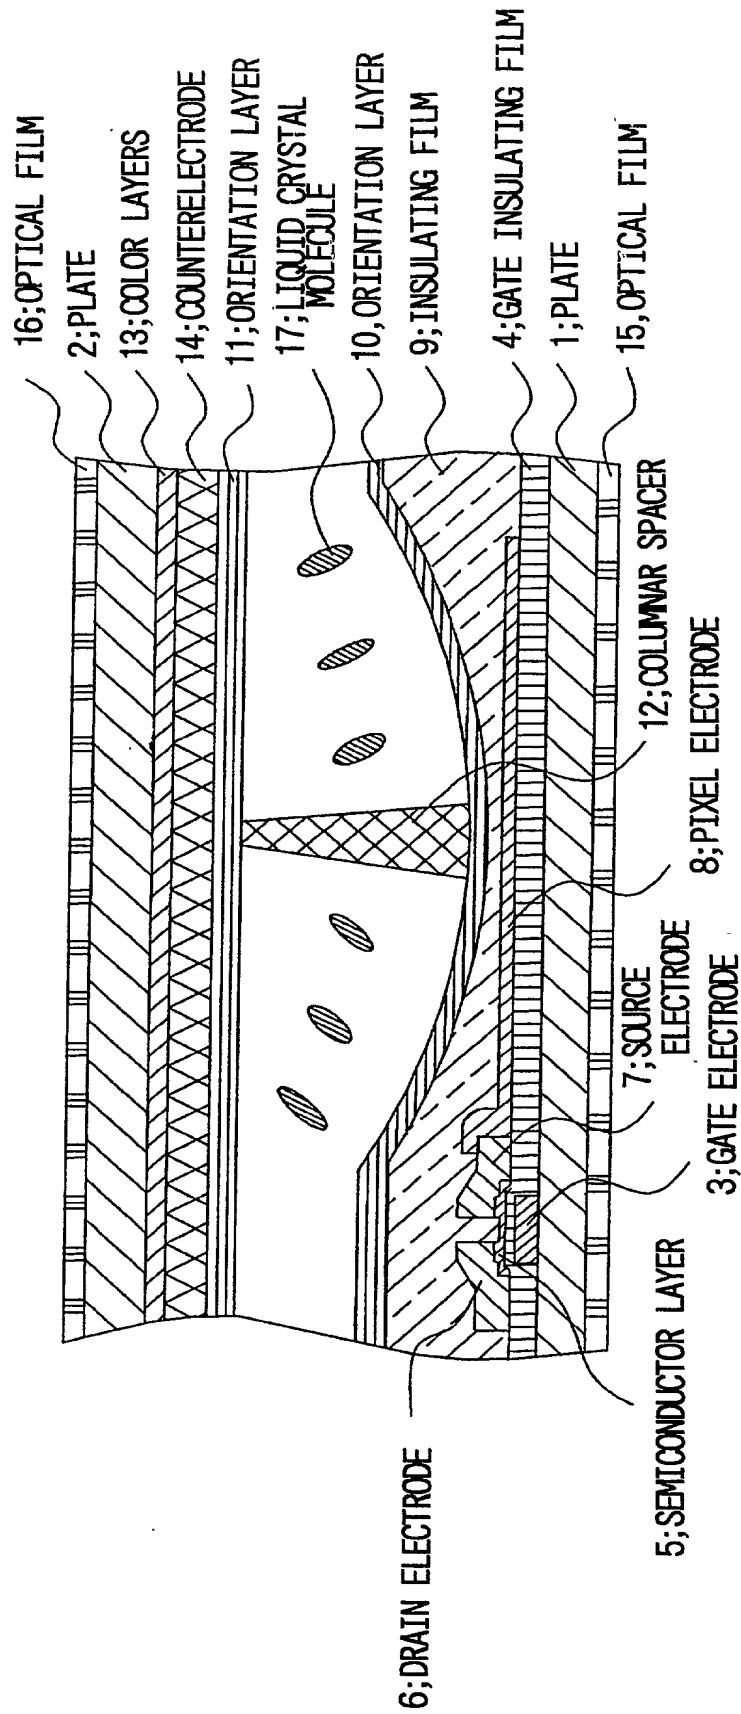

604200" 98448600

FIG. 2

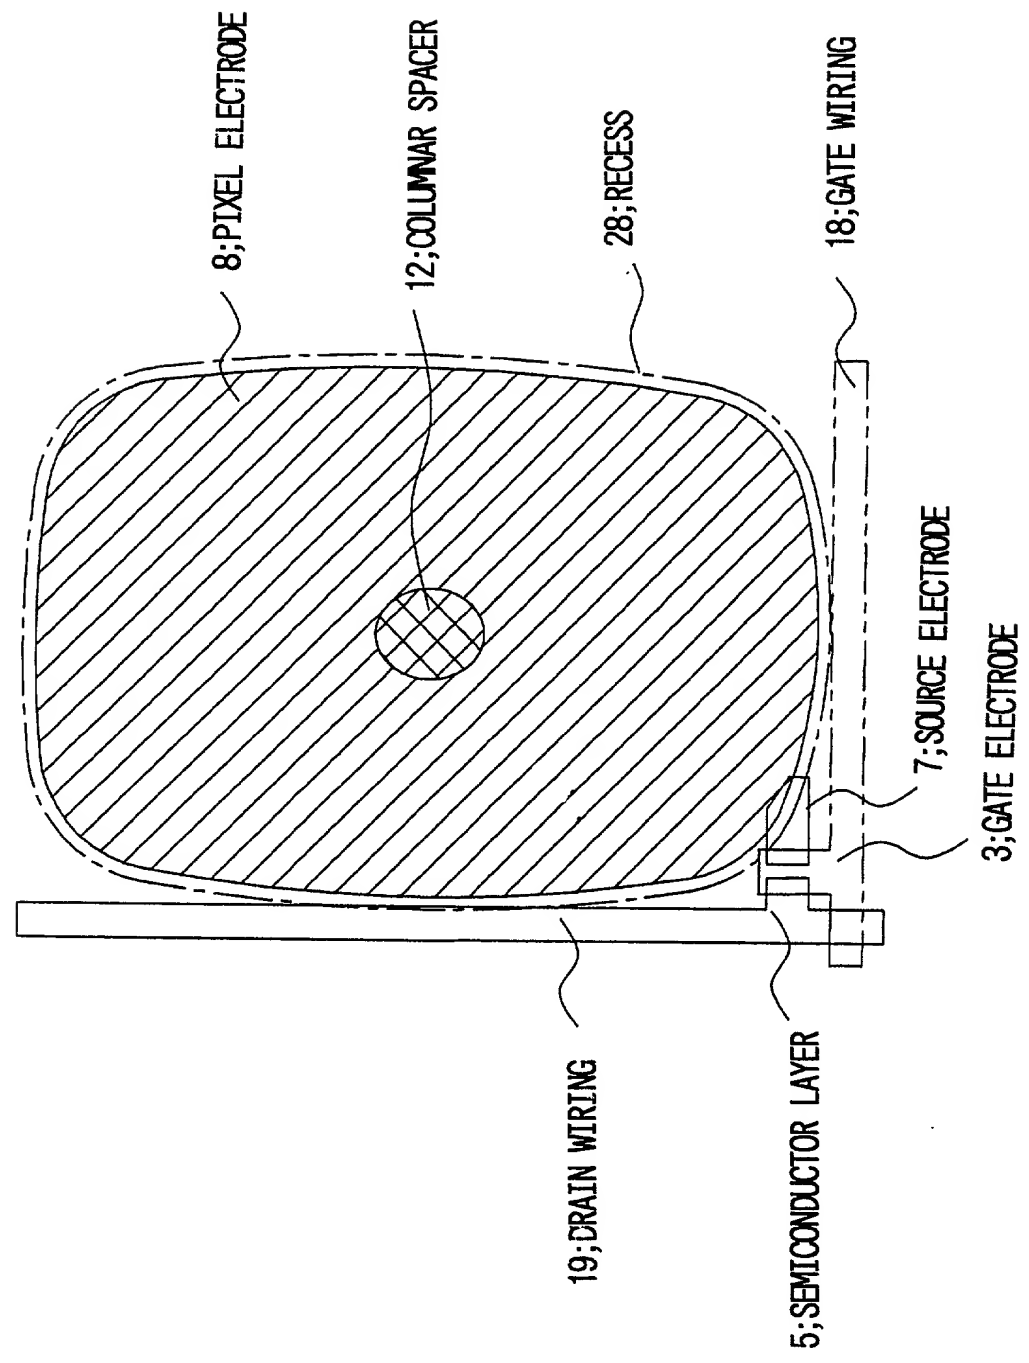


FIG. 3

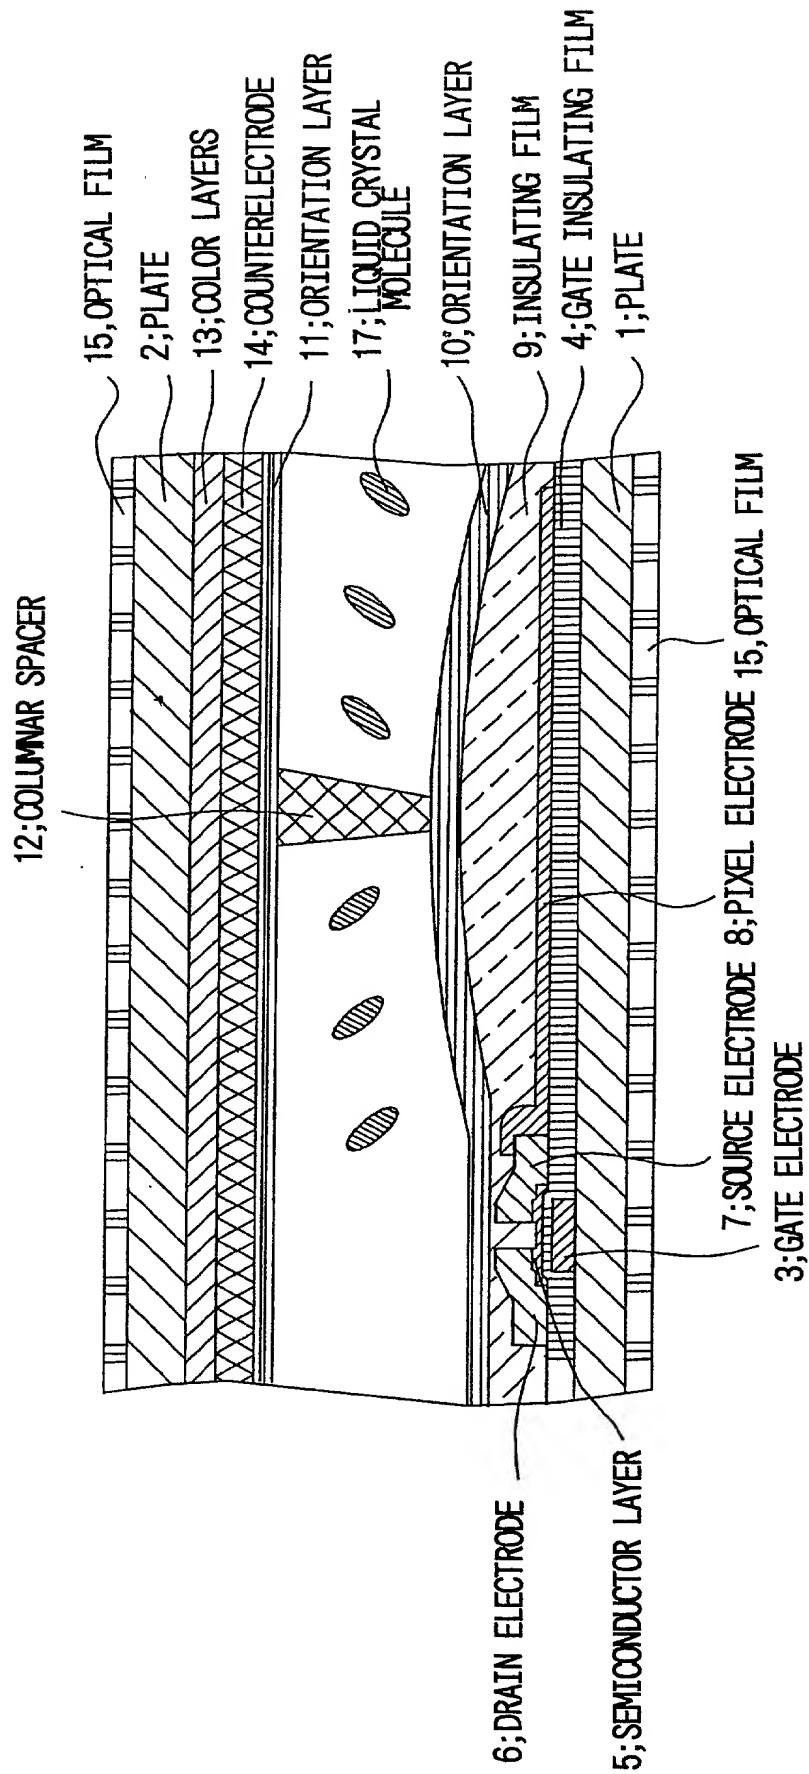


FIG. 4

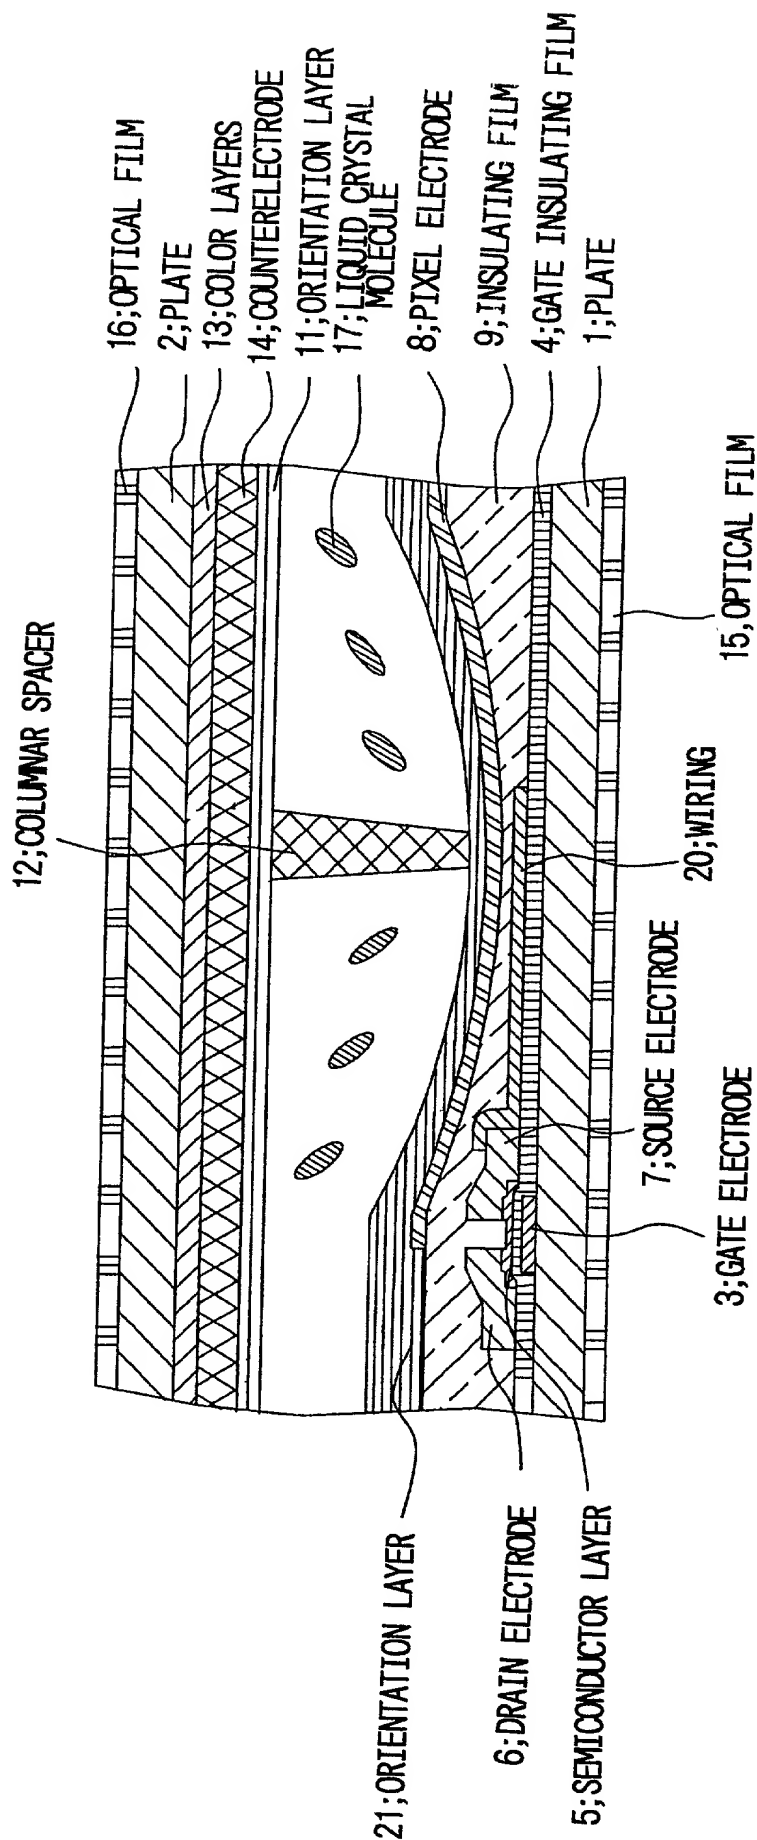


FIG. 5

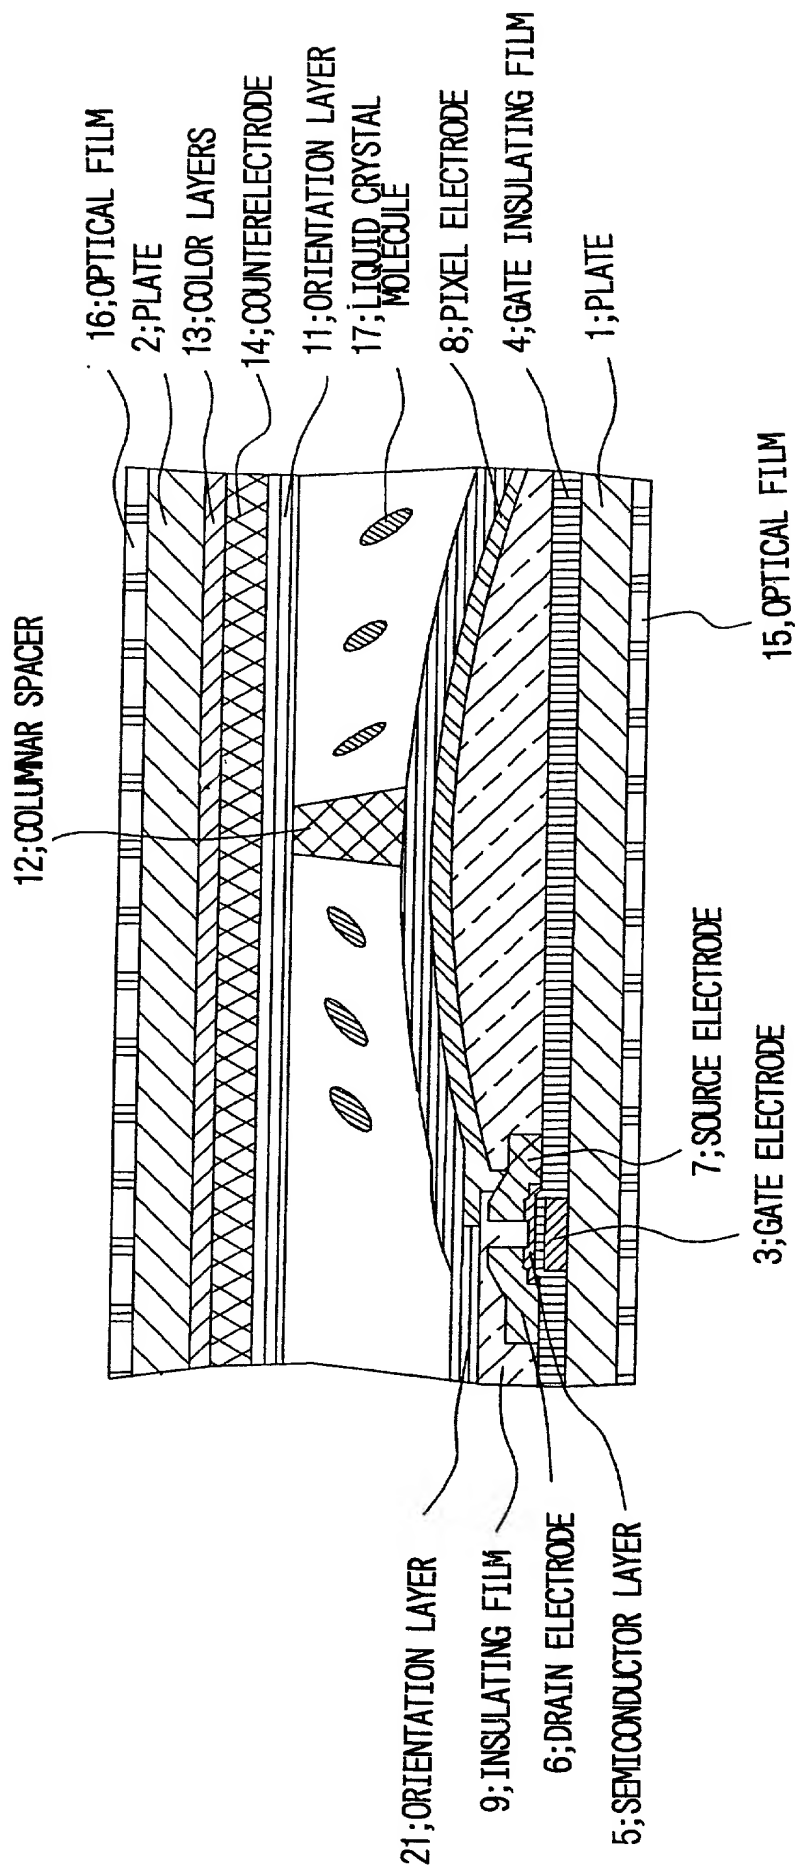


FIG. 6

PRIOR ART

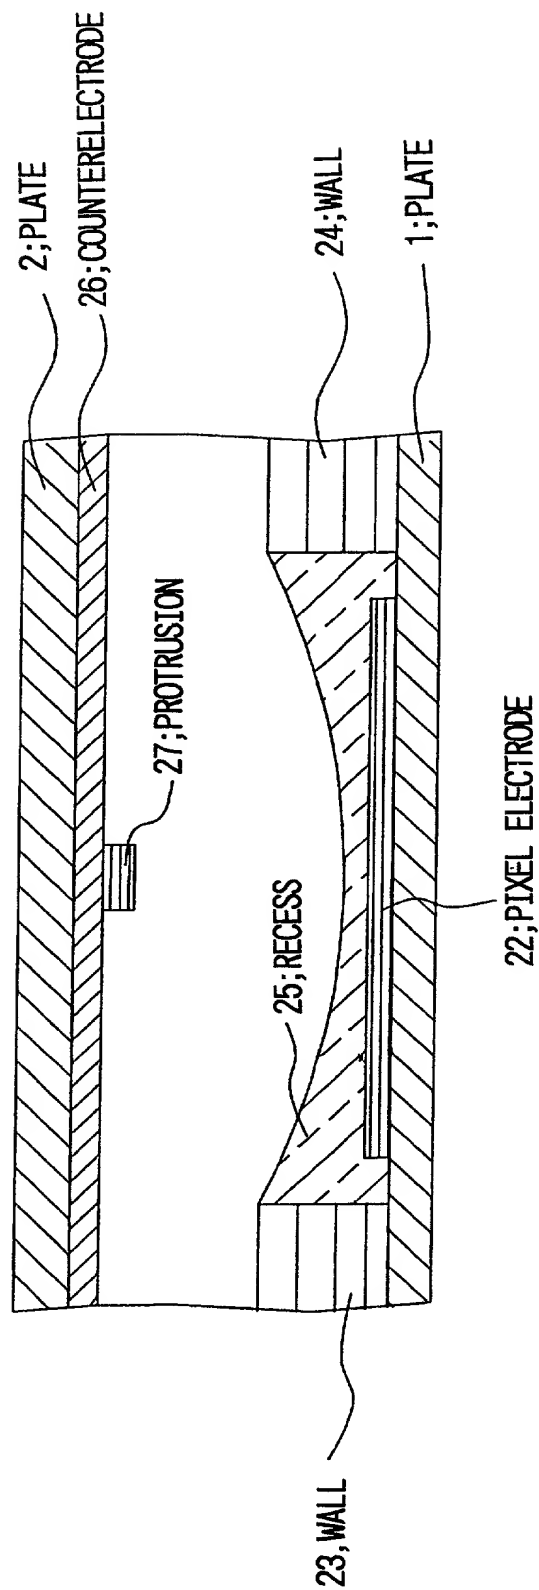


FIG. 7


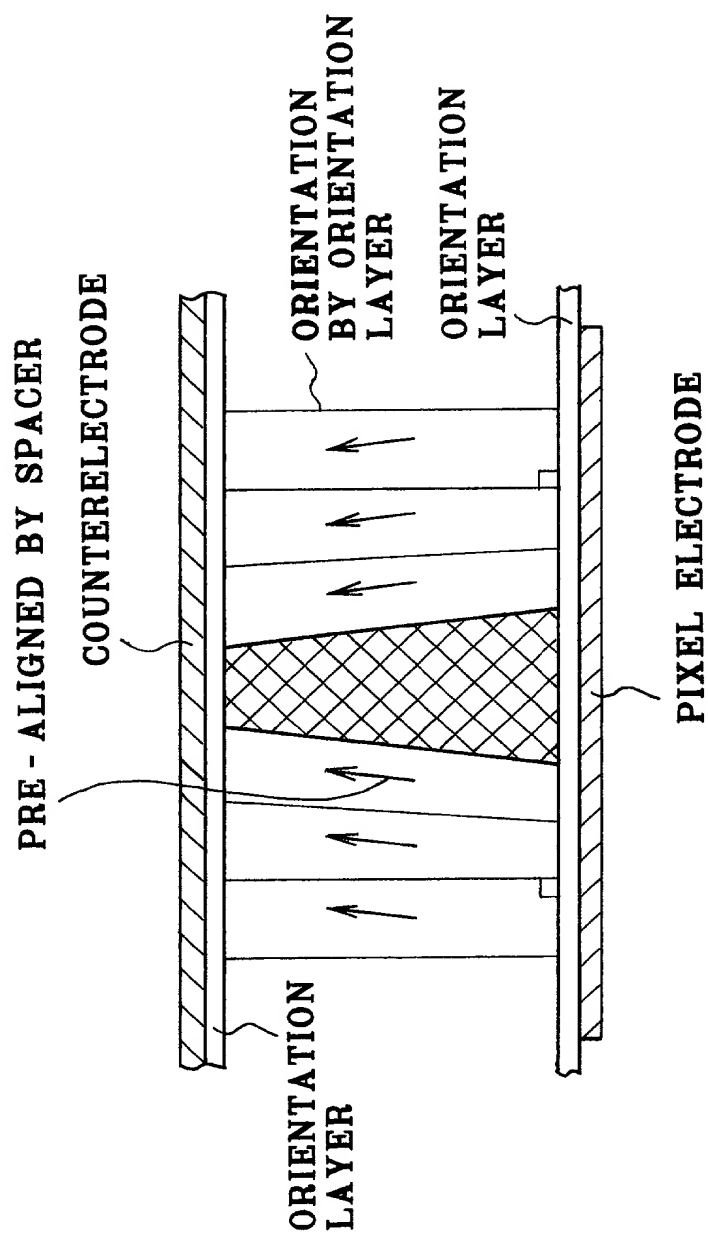


FIG. 8

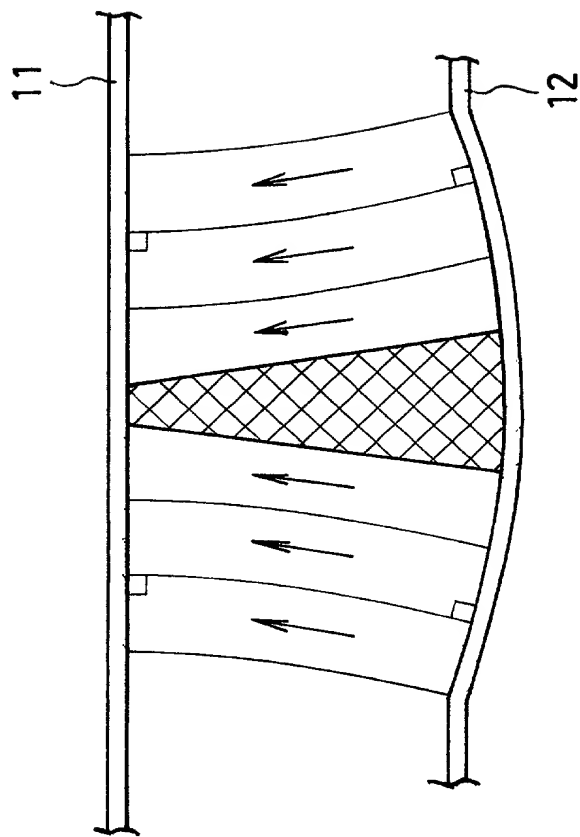

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NUMBER

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Liquid Crystal Display Device

the specification of which (check only one item below):

☒ is attached hereto.☐ was filed as United States application

Serial No. _____

on _____

and was amended

on _____ (if applicable).

☐ was filed as PCT international application

Number _____

on _____

and was amended under PCT Article 19

on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (If PCT indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
Japan	10-242740	28/8/1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

Combined Declaration For Patent Application and Power of Attorney (Continued)

(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NUMBER

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS		STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBER(S) ASSIGNED (if any)		

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. Anthony C. Scott, Reg. No. 25,439; Stephen D. Murphy, Reg. No. 22,002; Leopold Presser, Reg. No. 19,827; William C. Roch, Reg. No. 24,972; Kenneth L. King, Reg. No. 24,223; Frank S. DiGiglio, Reg. No. 31,346; Paul J. Esatto, Jr., Reg. No. 30,749; John S. Sensny, Reg. No. 28,757 and Mark J. Cohen, Reg. No. 32,211.

Send Correspondence to:

Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, NY 11530

Direct Telephone Calls to: (name and telephone number)

Leopold Presser
(516) 742-4343

201	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
202	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
203	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201	SIGNATURE OF INVENTOR 202	SIGNATURE OF INVENTOR 203
<i>Hiroaki Matsuyama</i>		
DATE 16 August, 1999	DATE	DATE

[] Signature for fourth and subsequent joint inventors.
Number of pages added _____.